


wind

## *Marine Wind Display*



Model 06206  
**Wind Tracker**

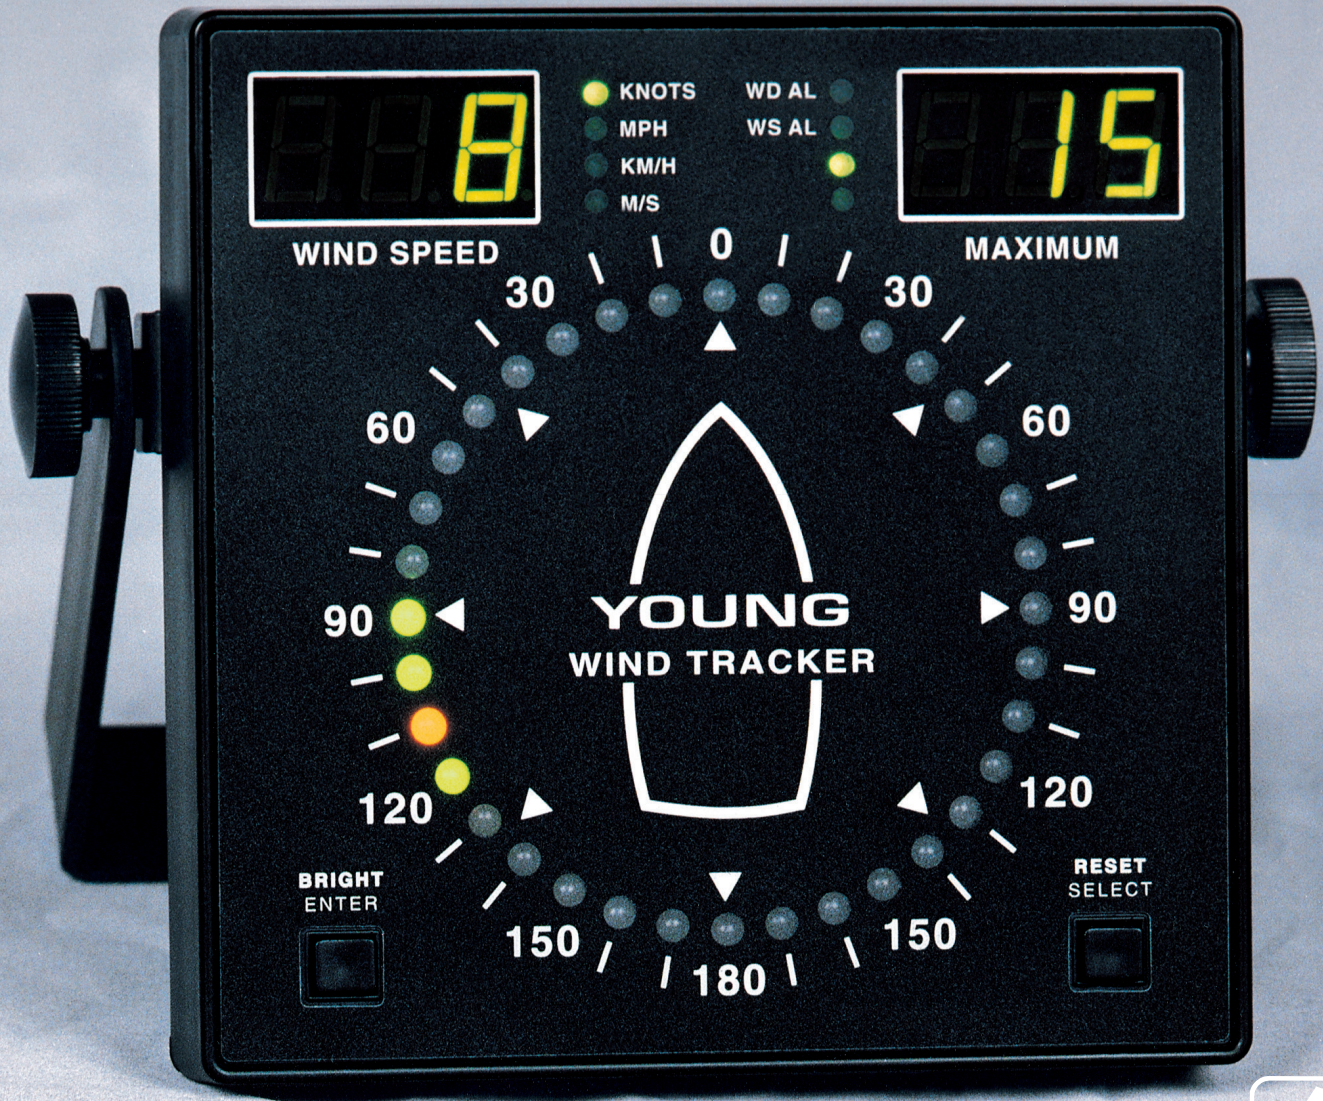

*Developed from our standard Wind Tracker, the Marine Wind Tracker has special features for ship-board use.*

Wind speed is displayed in your choice of units: KNOTS, MPH, KM/H, M/S. Maximum wind speed is saved on the display until reset by the operator.

Wind direction information is clearly displayed on a circular pattern of LEDs. Bold front panel graphics give a quick indication of wind angle relative to vessel heading. Brightness control allows adjustment for best viewing in any light. Luminous front panel markings allow viewing even in a darkened pilothouse.

4-20 mA inputs, Serial NMEA, and Voltage outputs are standard on the Marine Wind Tracker. Alarms for both wind speed and wind direction are included.



Wind Tracker pictured with Wind Monitor – MA

The Marine Wind Tracker is very compact. Face size is 144 mm x 144 mm to fit standard DIN panel configurations. Depth is 36 mm for easy mounting on vertical bulkheads or wall surfaces. 12-30 VDC input power enables the Wind Tracker to be powered by ship's batteries. A universal mounting bracket and AC wall adapter are included. Model 06260 Protective enclosure offers extra protection for wet or dusty locations.

## Specifications

### Wind Speed Range:

0-224 MPH  
0-100 M/S  
0-360 KM/H  
0-194 KNOTS

### Wind Direction Range:

0-180 degrees (port & starboard)

### Display Resolution:

Wind Speed & Maximum- 1 unit (0.1 unit M/S only)  
Wind Direction- 10 degrees (36 points circular),  
1 degree (digital display mode)

### Recommended Sensors:

Wind Monitor  
Wind Monitor-MA  
Wind Monitor-HD  
Wind Monitor-SE  
Wind Monitor-JR  
2D Ultrasonic Anemometer (86106, 91000)

### Other Inputs:

RS-485 (NMEA)  
4-20 mA

### Voltage Outputs:

0-5 VDC Full Scale for WS & WD

### Alarm Relays:

Normally Open contacts for WS & WD  
Contact Rating: 5A resistive,  
2A inductive @ 250 VAC, 30 VDC

### Remote Displays:

Up to 16 remote displays can be connected in parallel.

### Power Requirement:

12-30 VDC, 4.5 W

### Dimensions:

144 mm (5.65 in) x 144 mm (5.65 in) x 36 mm (1.4 in)

### Panel Cutout:

138 mm (5.43 in) x 138 mm (5.43 in)

### Weight:

1 lb (0.45 kg)

### Shipping Weight:

3 lb (1.4 kg)

## Ordering Information

## MODEL

MARINE WIND TRACKER- WIND SPEED/DIRECTION DISPLAY 100-240 V / 50-60 Hz ..... 06206  
PROTECTIVE ENCLOSURE..... 06260  
RACK MOUNTING PANEL- 19" Rack ..... 06280

**CE** Complies with applicable CE directives.  
Complies with EN60945  
Specifications subject to change without notice.



**R.M. YOUNG COMPANY**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA  
TEL: (231) 946-3980 FAX: (231) 946-4772  
E-mail: met.sales@youngusa.com  
Web Site: www.youngusa.com

Distributor in South Africa  
Metron (PTY) LTD  
89 Church Street  
Hopefield, 7355, S.A  
TEL: +27 (0)82 445 2531  
TEL: +27 (0)83 427 6186  
E-mail: itronics7@gmail.com  
Web Site: www.inteltronics.co.za